


Blonder Tongue

BT-CMTS-3210

Cable Modem Termination System

The **BT-CMTS-3210** is a Cable Modem Termination System targeted for medium- to large-size deployments to provide two-way data services on a coaxial network. The system is designed to support up to 500 DOCSIS 3.0/2.0 cable modems.

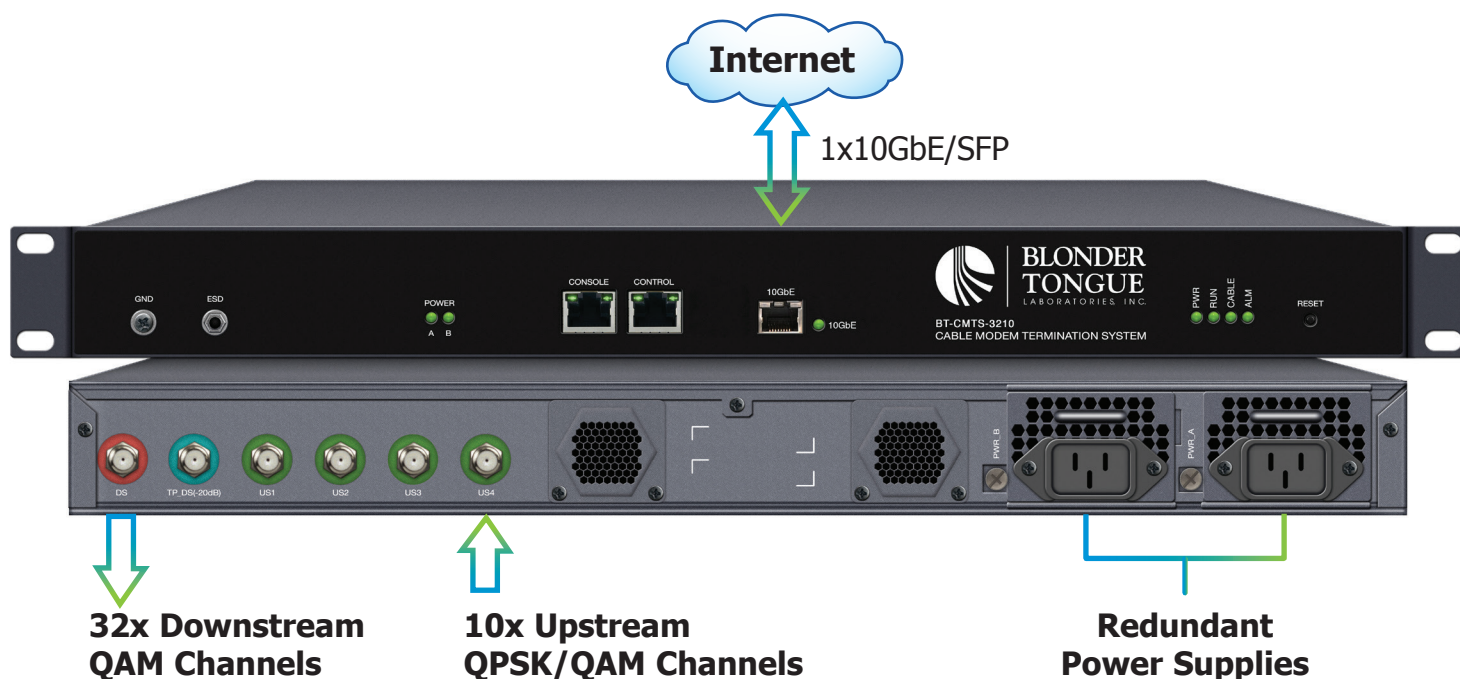

Features

- DOCSIS/EuroDOCSIS 3.0/2.0 compatible
- High Bandwidth:
 - 32 downstream channels, up to QAM 1024
 - 10 upstream channels, up to QAM 256
- 1RU 19 inch chassis with dual redundant universal power supplies - hot-swappable
- End-to-end Quality of Service (QoS)
- Support Real-time CPE Info
- Load Balancing Function:
 - Dynamic balancing, restricted load balancing group
 - Support load balancing strategy
- Subnet VLAN & L2VPN
- Spectrum Monitoring
- Automatic Frequency Hopping
- Internal DHCP server
- Dual-Stacked IPv4/IPv6 capability

Ordering Information

Model	Stock #	Description
BT-CMTS-3210	2342	DOCSIS/EuroDOCSIS 3.0 CMTS (Cable Modem Termination System)

Specifications

Input/Output Interfaces

Connectors	10GbE Standard: 2x SFP (For Optical Plug-In) Ethernet
RF Upstream	Connectors: 4x "F" Conn. # of Channels: 10 Frequency Range: 5-65 MHz Modulation Mode: QPSK/QAM 16, QAM 32, QAM 64, QAM 256 Bandwidth: 1.6, 3.2 or 6.4 MHz Receive Level: -7 to +23 dBmV (53 to 83 dBuV) @ 6.4 MHz -10 to +20 dBmV (50 to 80 dBuV) @ 3.2 MHz -13 to +17 dBmV (47 to 77 dBuV) @ 1.6 MHz QoS Flow: 4K
RF Downstream	Connectors: 1x "F" conn. # of Channels: 32 Frequency Range: 52-1002 MHz Modulation Mode: QAM 64, QAM 256, QAM 1024 Bandwidth: 6.0/8.0 MHz RF Level: +44 dBmV (104 dBuV) QoS Flow: 4K

Alarms/Monitoring/Control

Local Monitoring:	1x Power A (Power Supply A) 1x Power B (Power Supply B) 10x GbE 2x SFP 1x PWR 1x RUN 1x CABLE 1x ALM 1x Reset
Control:	GUI-based menu via Web Browser (1x RJ45 connector; 1GbE)
Console:	1x RJ45 Front-Panel Connector

System Functions

DHCP	DHCP relay/snooping DHCP bundle DHCP lease query
DHCPv6:	DHCPv6 relay/snooping DHCPv6 bundle DHCPv6 lease query DHCPv6-PD Supports Vendor Class string to identify equipment type Supports Insert Remote-ID, Interface-ID, CMTS capabilities and CM MAC
IPv6:	IPv4 and IPv6 dual-stack
VLAN & L2VPN:	802.1ad/802.1q/subnet VLAN Service flow-based VLAN addition or deletion VLAN addition according to option60 L2VPN support VLAN conversion
QoS:	Static service flow/dynamic service flow/service class DOCSIS 3.0 USCB scheduling PowerBoost
MAC Domain Management:	MDD & MDF enable and disable MTC & MRC enable and disable UDC enable and disable Piggyback, shared-secret, channel bonding
Multicast:	Multicast authentication Static Multicast IGMP V2/V3 Snooping
Load balance:	RLBG/GLBG
Spectrum Monitor:	Reverse spectrum monitoring (0~81 MHz)
Automatic Opening:	Automatic Opening and upgrade based on DHCP and TFTP PN8600 series OLT unified opening and upgrade support

General

Electrical	Power: 90V-264VAC, 50/60 Hz (dual redundancy power supplies)
	Power Consumption: 52 W
Mechanical	Operating Temperature: 32 to 104 °F (0 to 40 °C) Operating Humidity: 10% to 90% (Non-condensing) Dimensions (W x D x H): 19"x 11.8" x 1.75" (480mm x 300mm x 44mm) Weight: 12 lbs (5.5kg)

Related Products

Model	Description
BT-CMTS-31000	DOCSIS 3.1/3.0/2.0 CMTS with Mixed Mode Feature (Simultaneous 3.1 & 3.0 CM Support)
BT-CMTS-3000	DOCSIS 3.0 CMTS; 16x Downstream; 4x Upstream Channels
DMM-5500-PoE	DOCSIS Modem Module with Power over Ethernet (PoE) Port
DMM-5500	DOCSIS Modem Module
BTPRO-7000 CM8FO	HD Tablet with Cable Modem and Fiber Optic Options