



CV NTSC32

IP DIGITAL TO NTSC RF ANALOG SYNTHESIZER



KEY FEATURES

- » Creates a 32 NTSC RF analog modulated channel lineup
- » Decodes MPEG-2, H.264, and H.265 video content
- » Dolby® Digital AC3, AAC, MPEG1-Layer2, MP3 audio decode
- » Line 21 Closed Caption EIA 608 pass through
- » Supports AFD or Manual aspect ratio configuration, 4:3 or 16:9

APPROVED
FOR COM3000
DEPLOYMENTS

PRODUCT OVERVIEW

The **CV NTSC32** is a cutting-edge 1RU, multi-channel digital to RF analog synthesizer, designed to convert up to 32 HD or SD programs and the primary audio channel to 32 NTSC modulated RF analog channels.

The **CV NTSC32** can input MPEG-2, MPEG-4/H.264 (AVC), or H.265 (HEVC) formats from an IP transport stream. Each IP MPEG transport stream is decoded, NTSC synthesized, and modulated to an STD, IRC, or HRC RF analog channel. All 32 NTSC channels are agile within a 599 MHz frequency block. Users may place the 599 MHz block anywhere within the 54 to 1002 MHz frequency span.

ORDERING INFORMATION



MODEL	STOCK#	DESCRIPTION
CV NTSC32	6574	IP Digital to RF Analog Synthesizer; 32 Channels

CV NTSC32

SPECIFICATIONS



INPUT

Connector	32x SPTS from Front Panel RJ45 (IP Video Port)
Standard	1000Base-T (GbE)

STREAM PROTOCOLS

Video Formats	MPEG-2; H.264 (AVC); H.265 (HEVC)
Encryption	Clear or "NTSC8" from COMM3000 (COM51_ST04.01.83 ++)
Video Resolutions	480i (59.94, 60 FPS); 480p (29.97, 30 FPS); 720p (29.97, 30, 60 FPS); 1080i (59.94, 60 FPS); 1080p (30, 59.94, 60 FPS)
Closed Captioning	EIA-608
Routing Protocol	Unicast

AUDIO

Audio Format	Dolby® AC3, AAC, MPEG1-Layer2, MP3
--------------	------------------------------------

GENERAL

Dimensions (W x H x D)	19.0 x 1.75 x 19.2 in (483 x 45 x 488 mm)
Weight	9.5 lbs (4.31 kg)
Power	110/230 VAC, 0.8/0.4 A, 60/50 Hz
Power Consumption	45 W
Operating Temp.	32 to 122 °F (0 to 50 °C)
Storage Temp.	-13 to 158 °F (-25 to 70 °C)
Operating Humidity	0 to 95% RH @ 35 °C max, non-condensing

ALARMS & MONITORING

Local Monitoring	1x Power and Status LED (Bicolor) 1x Fan Control Status LED (Bicolor) 32x Decoder Status LED (Bicolor)
Local Control	1x IP Reset Button
Monitor Output	1x RF Test (-20dB) Connector
Remote Monitoring	Built-in Web Server Remote browser access with status

OUTPUT

Connector	1x "F" Female
-20dB RF Test Point	1x "F" Female

RF

Frequency Range	54 to 1002 MHz
# of Output Channels	32 channels in a 599 MHz span
Channel Plans	Standard, IRC, HRC
Output Power	+48 dBmV per channel, ± 1 dB
Broadband Flatness	± 1 dB
Level Adjustment Range	15 dB (± 0.5 dB increment)
Impedance	75 Ω
Return Loss	>14 dB
Test Level	-20 dB (± 2 dB of Main RF Output)
Test Return Loss	>12 dB
Spurious	> -60 dB
Phase Noise	-110 dBc @ 10 kHz offset
Frequency Accuracy	± 3 ppm
Freq. Response (in-channel)	± 0.5 dB
Signal to Noise Ratio (SNR)	65 db @ +48 dBmV output
Broadband Noise Floor	65 dB, 4 MHz BW, +48 dBmV output
Adjacent Chan. Interference	> -60 dB
Closed Captioning	EIA-608 (Line 21)


AUDIO

Type	Monaural
Signal to Noise Ratio (SNR)	65 dB
Frequency Response	± 0.5 dB, 50 Hz to 15 kHz
Lag Time	≤ 45 ms
Lead Time	≤ 15 ms

CV NTSC32
IP DIGITAL TO NTSC RF ANALOG SYNTHESIZER

I/O OVERVIEW

APPROVED
FOR COM3000
DEPLOYMENTS

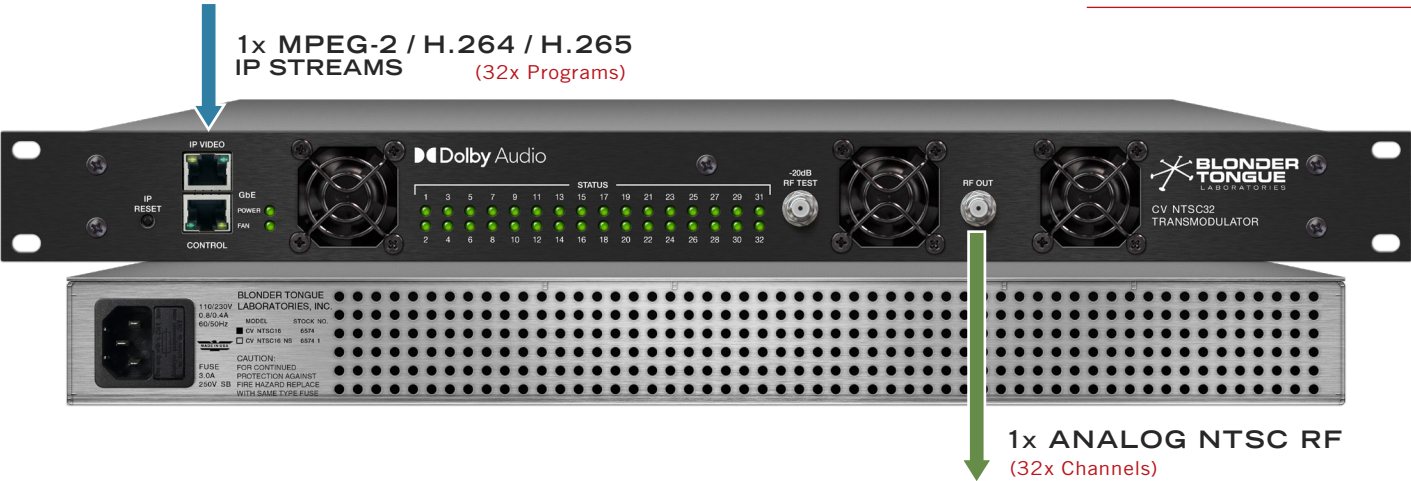

ORDERING INFORMATION



MODEL	STOCK#	DESCRIPTION
CV NTSC32	6574	IP Digital to RF Analog Synthesizer; 32 Channels



SALES DEPARTMENT
sales@blondertongue.com

CUSTOMER SERVICE
custsvc@blondertongue.com

CONNECT WITH US

