



FIBT-1310 SERIES

1310nm FIBER OPTIC TRANSMITTERS



KEY FEATURES

- » 47 to 1218 MHz RF bandwidth for DOCSIS 3.1 compatibility
- » High performance and low power consumption GaAs technology
- » 1310 nm DFB laser in 4 output power levels (6, 10, 13.5, and 15 dBm)
- » RF AGC for optimum laser performance
- » LCD front panel status display with built-in microprocessor
- » SNMP network management for remote monitoring
- » ETL certified

PRODUCT OVERVIEW

The **FIBT-1310** (Fiber Optic Transmitter) is an ideal solution to seamlessly transport high-speed digital data over single-mode optical fiber. It is designed to transport data streams that adhere to DOCSIS 3.1 standards and/or were generated utilizing high order quantization techniques, such as QAM 1024, 8PSK, and COFDM.

The **FIBT-1310** is built with a directly modulated DFB laser, providing low noise and high linearity performance. The RF AGC and pre-distortion circuit ensures the optimum laser drive level for the best overall CNR, CSO, and CTB operation. The transmitter is available in power output levels ranging from +6 dBm (4 mW) to +15 dBm (31 mW) to satisfy various system topologies and supports an increased band-edge to 1218 MHz for DOCSIS 3.1 applications.

Laser output power, unit temperature, and RF input level are accurately monitored by a built-in microprocessor and shown on the front panel LCD display, in addition to the unit function messages. Remote status monitoring is provided through SNMP network management.

ORDERING INFORMATION

MODEL	STOCK#	DESCRIPTION
FIBT-1310-06	7603 06	Fiber Optic Transmitter, Single-mode, DFB Laser; 1310 nm, +6 dBm Output
FIBT-1310-10	7603 10	Fiber Optic Transmitter, Single-mode, DFB Laser; 1310 nm, +10 dBm Output
FIBT-1310-13.5	7603 135	Fiber Optic Transmitter, Single-mode, DFB Laser; 1310 nm, +13.5 dBm Output
FIBT-1310-15	7603 15	Fiber Optic Transmitter, Single-mode, DFB Laser; 1310 nm, +15 dBm Output

FIBT-1310 SERIES

SPECIFICATIONS



OPTICAL	
Operating Wavelength	1310 nm ± 20 nm
Optical Power Output	6 dBm (4 mW), 10 dBm (10 mW), 13.5 dBm (16 mW) & 15 dBm (31 mW)
Laser Type	Class 1 Cooled DFB (directly modulated; Hazard Level 1).
Beam Divergence Angle:	8° max
Connector	SC/APC (FC/APC connection adapter is sold separately for applications requiring it. See below under "Accessories")

LINK PERFORMANCE*	
CNR	≥ 51 dB (see Optical Link C/N Table)
CSO	< -62 dBc
Operating Humidity	< -65 dBc

* 77 CW carriers (50-550 MHz) and digital channels (550 - 1218 MHz, RF level 10 dB lower) at -1 dBm optical input into a Blonder Tongue FTTB receiver.

RF	
Connector	"F" Female
Frequency Range	47-1218 MHz
Input Level	15-25 dBmV
Flatness	±1.0 dB
Impedance	75 Ω
Return Loss	≥ 16 dB
AGC Range	0-15 dB
MGC Range	0-15 dB

GENERAL	
Dimensions (W x H x D)	19.0 x 1.75 x 15.31 in (483 x 44 x 369 mm)
Weight	7.0 lbs (3.18 kg)

POWER	
Power Supply	100-240 VAC 50/60 Hz
Power Consumption	15 W

ENVIRONMENTAL	
Operating Temp. Range	32 to 113 °F (0 to 45 °C)
Relative Humidity	0 to 95%, non-condensing

ALARMS & MONITORING	
Local Monitoring	1x Status Tri-Color LED (Red, Green, Amber)
Local Control	Display: LCD Navigation: 3 Buttons for LCD (Up/Down/Enter)
Remote Monitor/Control	SNMP: RJ45 Connector @ 100/1G

ACCESSORIES

STOCK#	STOCK#	DESCRIPTION
FC/APC Adapter	7607	SC/APC Male to FC/APC Female Connector Adapter


FIBT-1310 SERIES

1310nm FIBER OPTIC TRANSMITTERS

OPTICAL LINK C/N TABLE

OPTICAL LOSS (dB)	6	7	8	9	10	11	12	13	14	15	16	17
FIBT-1310-06	52.0	51.0	50.1	49.1	48.1							
FIBT-1310-10					51.9	51.0	50.1	49.1	48.2			
FIBT-1310-13.5								52.3	51.3	50.4	49.5	
FIBT-1310-15										51.9	50.9	49.9

FUNCTION BLOCK DIAGRAM

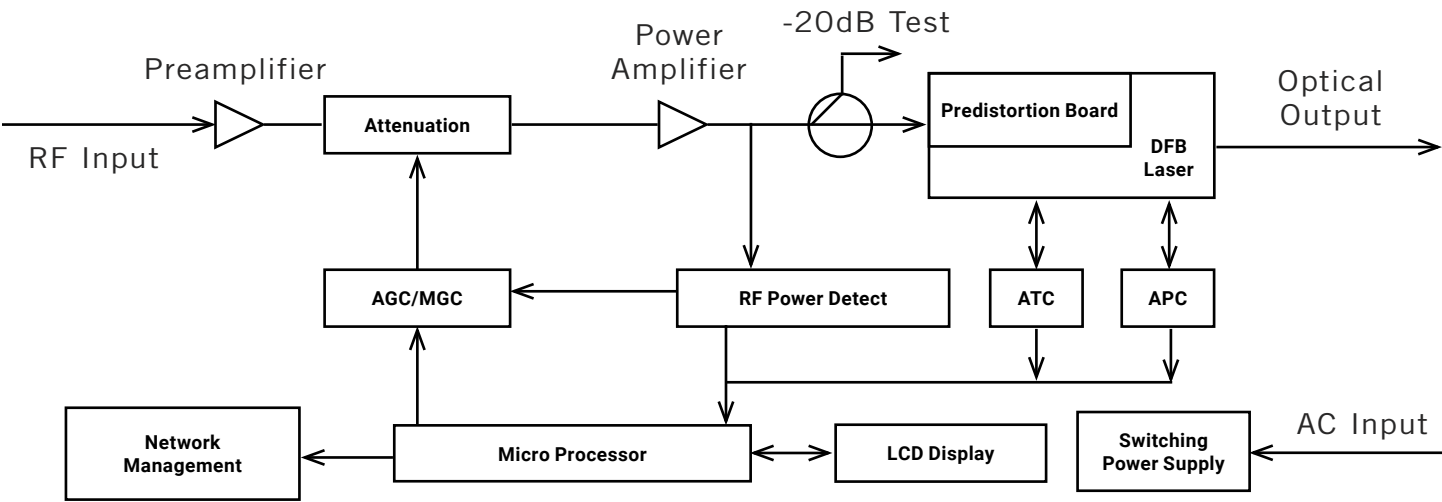

ORDERING INFORMATION

MODEL	STOCK#	DESCRIPTION
FIBT-1310-06	7603 06	Fiber Optic Transmitter, Single-mode, DFB Laser; 1310 nm, +6 dBm Output
FIBT-1310-10	7603 10	Fiber Optic Transmitter, Single-mode, DFB Laser; 1310 nm, +10 dBm Output
FIBT-1310-13.5	7603 135	Fiber Optic Transmitter, Single-mode, DFB Laser; 1310 nm, +13.5 dBm Output
FIBT-1310-15	7603 15	Fiber Optic Transmitter, Single-mode, DFB Laser; 1310 nm, +15 dBm Output



SALES DEPARTMENT
sales@blondertongue.com

CUSTOMER SERVICE
custsvc@blondertongue.com

CONNECT WITH US

