



# NXG-CRYPTOLINK INNOVATIVE-S

SECURE INNOVATIVE SYSTEMS DECRYPTION & DESCRAMBLING MODULE



## KEY FEATURES

- » Supports Decryption of Innovative Systems™ as well as the NXG-BTCrypt module content
- » Supports up to **512** Channels of bulk decryption / descrambling
- » Supports Multicast with IGMPv2 and IGMPv3
- » 2 separate 1 Gbps RJ45 input ports

## PRODUCT OVERVIEW

The **NXG Cryptolink Innovative Systems** module accepts incoming Innovative Systems encrypted IP single program transport streams from Multicast sources, for the decryption and descrambling of up to **512** Channels from front panel RJ45 GbE ports. This lets operators manage SMB and Hospitality video customers from their residential multicast IP TV systems, rather than operating several technologies in parallel.

NXG Cryptolink modules can also accept input from other Blonder Tongue NXG-BTCRYPT modules to create highly secure private transmission and reception links between multiple partner devices. NXG Cryptolink is also adaptable to integrate with additional partner devices. Can supports AES and other standard symmetric key international standards.

## ORDERING INFORMATION



MODEL	STOCK#	DESCRIPTION
NXG-Cryptolink Innovative-S	<b>6798 4S</b>	Secure Innovative Systems Decryption Module

INPUT / OUTPUT INTERFACES	
DATA PORTS	
ABR Protocol	MPEG - DASH
IP	2.5 Gb from NXG Backplane (IP from Master Controller)
Encryption	AES128
Video Resolution	Pass-through
Closed Captioning	EIA-608 / EIA-708
Addressing	Unicast
AUDIO	
Input Formats	Pass-through only
Input Formats	Pass-through only

GENERAL	
Dimensions (W x H x D)	1.15 x 7.0 x 15.5 in (29 x 178 x 394 mm)
Weight	2.0 lbs (0.9 kg)
Power	DC via NXG Mainframe Backplane
Power Consumption	20 W
Operating Temp.	32 to 122 °F (0 to 50 °C)
Storage Temp.	-13 to 158 °F (-25 to 70 °C)
Operating Humidity	0 to 95% RH @ 35 °C max, non-condensing


OUTPUT	
UDP	SPTS to NXG Mainframe Backplane
STREAM PROTOCOLS	
Standard	ISO / IEC 13818-1 Systems
TS Packet Length	188 bytes
Sync Byte	0x47
Encoding Type	Passthrough
Video Data Rates	Passthrough
TS Supported	512 SPTS
Video Format	MPEG-2; H.264 (AVC); H.265 (HEVC) (Pass-through only)
Video Resolution	Pass-through only
Addressing	Unicast
AUDIO	
Output Formats	Pass-through only

ALARMS & MONITORING	
Front Panel	1x Status LED (Bicolor)


# NXG-CRYPTOLINK INNOVATIVE-S

SECURE INNOVATIVE SYSTEMS DECRYPTION & DESCRAMBLING MODULE

## CUSTOMER PREMISE APPLICATION EXAMPLE

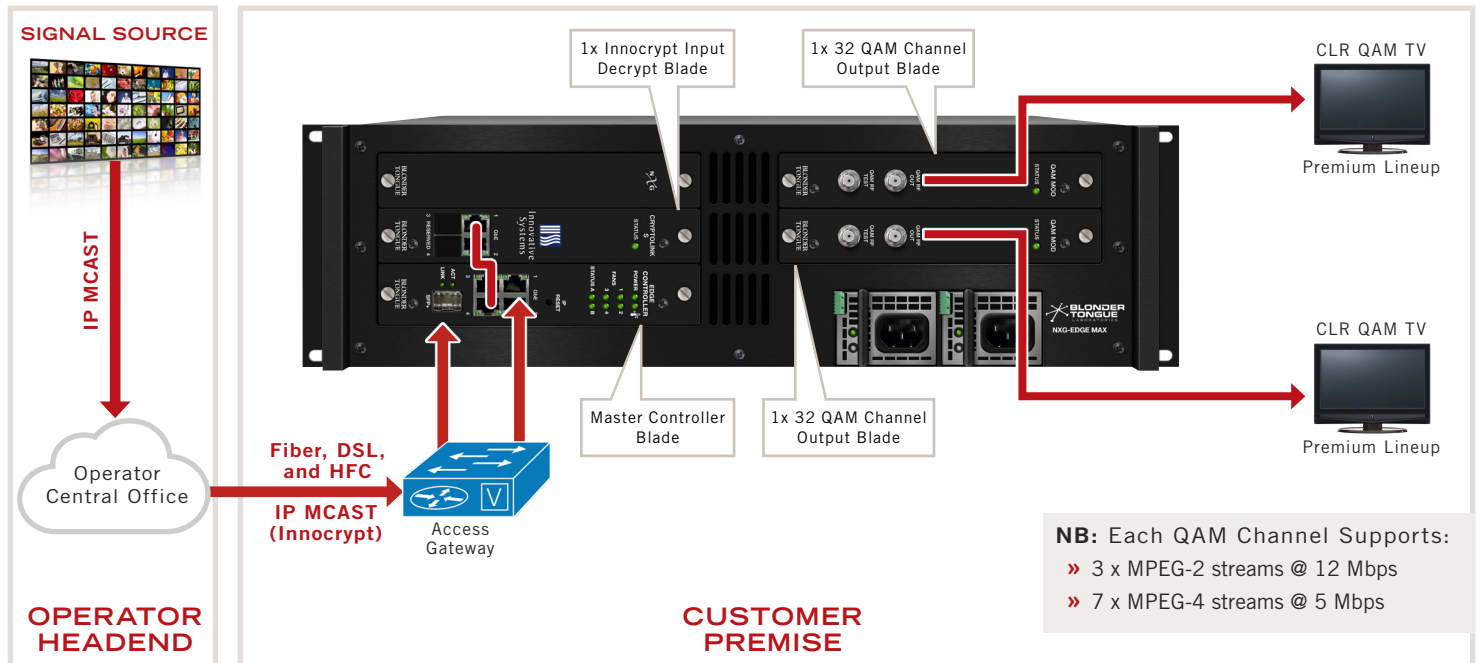

## HEADEND-BASED APPLICATION EXAMPLE

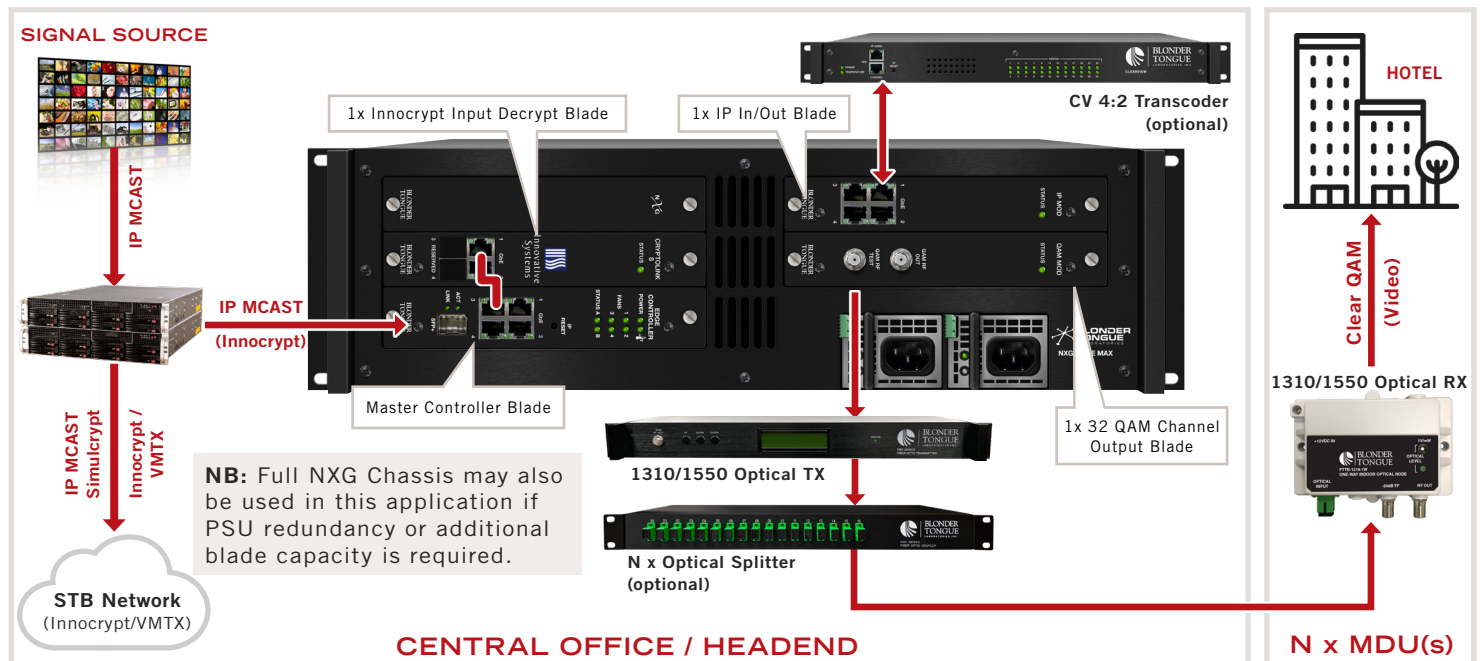



**SALES DEPARTMENT**  
sales@blondertongue.com

**CUSTOMER SERVICE**  
custsvc@blondertongue.com

---

**CONNECT WITH US**



**MORE NXG**

